


## MÉRETEK

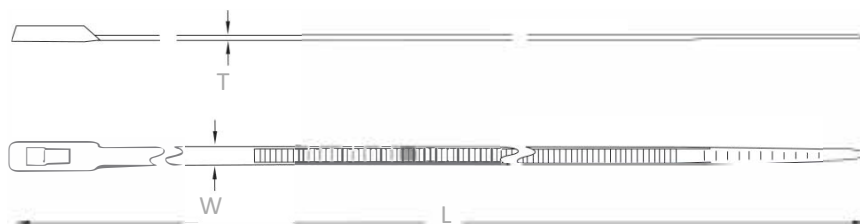

|                  | L [mm] | T [mm] | W [mm] |
|------------------|--------|--------|--------|
| <b>NCA 0-46</b>  | 160    | 1.6    | 4.7    |
| <b>NCA 0-55</b>  | 200    | 1.6    | 4.7    |
| <b>NCA 0-89</b>  | 310    | 1.6    | 4.7    |
| <b>NCA 0-100</b> | 432    | 1.8    | 4.8    |
| <b>NCA 0-125</b> | 450    | 2.0    | 8.0    |
| <b>NCA 0-185</b> | 610    | 2.0    | 9.0    |
| <b>NCA 0-246</b> | 812    | 2.0    | 9.0    |
| <b>NCA 0-270</b> | 914    | 2.0    | 9.0    |
| <b>NCA 0-380</b> | 1219   | 2.0    | 9.0    |

## Minimális szakítószilárdsági értékek

|                  | [N] 21°C (N/mm <sup>2</sup> ) | [N] +80°C (N/mm <sup>2</sup> ) | [N] -40°C (N/mm <sup>2</sup> ) |
|------------------|-------------------------------|--------------------------------|--------------------------------|
| <b>NCA 0-46</b>  | 220                           | 165                            | 165                            |
| <b>NCA 0-55</b>  | 220                           | 165                            | 165                            |
| <b>NCA 0-89</b>  | 220                           | 165                            | 165                            |
| <b>NCA 0-100</b> | 220                           | 165                            | 165                            |
| <b>NCA 0-125</b> | 530                           | 413                            | 413                            |
| <b>NCA 0-185</b> | 800                           | 600                            | 600                            |
| <b>NCA 0-246</b> | 800                           | 600                            | 600                            |
| <b>NCA 0-270</b> | 800                           | 600                            | 600                            |
| <b>NCA 0-380</b> | 800                           | 600                            | 600                            |

