
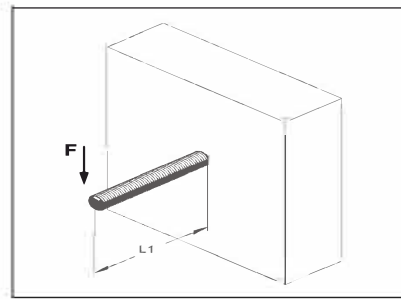


Műszaki jellemzők

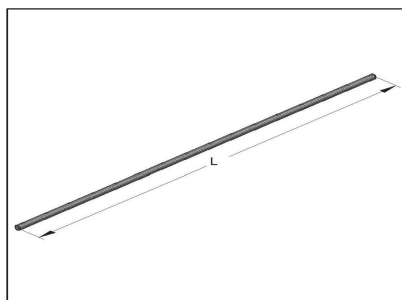

Jóváhagyott terhelések* hajlításra

L1	M8	M10	M12
[mm]	F [kN]	F [kN]	F [kN]
50	0.10	0.20	0.34
100	0.04	0.10	0.17
150	0.02	0.05	0.11
200	0.01	0.03	0.06
250	-	0.02	0.04
300	-	0.01	0.03
350	-	-	0.02
400			0.01

* $f_Y = 235 \text{ N/mm}^2$, Bizt. tényező=1,5, E-Modul=210.000 N/mm²
 max. lehajlás $f = L/150$ a feszültségi keresztmetszetre vonatkozóan

Menet	Hossz [mm]	Max. húzóerő [kN]	FWD 30 [kN]	FWD 60 [kN]	FWD 90 [kN]
M6	1000	0.15	-	-	
M8	1000	8.96	0.79	0.45	0.34
M8	2000	8.96	0.79	0.45	0.34
M8	3000	8.96	0.79	0.45	0.34
M10	1000	14.20	1.26	0.72	0.55
M10	2000	14.20	1.26	0.72	0.55
M10	3000	14.20	1.26	0.72	0.55
M12	1000	20.64	1.83	1.05	0.80
M12	2000	20.64	1.83	1.05	0.80
M12	3000	20.64	1.83	1.05	0.80

